

PCT


WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 7 : <b>H04B 1/10</b>	<b>A1</b>	(11) International Publication Number: <b>WO 00/64061</b> (43) International Publication Date: <b>26 October 2000 (26.10.00)</b>
(21) International Application Number: <b>PCT/SE00/00668</b> (22) International Filing Date: <b>7 April 2000 (07.04.00)</b> (30) Priority Data: <b>99/013,849</b> <b>16 April 1999 (16.04.99)</b> <b>US</b> (71) Applicant: <b>TELEFONAKTIEBOLAGET LM ERICSSON</b> (publ) [SE/SE]; S-126 25 Stockholm (SE). (72) Inventors: <b>GÖRANSSON, Bo</b> ; Hagagatan 5, S-113 48 Stockholm (SE). <b>CEDERVALL, Mats</b> ; Långkärrsvägen 40, S-187 44 Täby (SE). <b>SORELIUS, Joakim</b> ; Börjegatan 5 B, S-753 13 Uppsala (SE). (74) Agents: <b>LARFELDT, Helene et al.</b> ; Bergenstråhle & Lindvall AB, P.O. Box 17704, S-118 93 Stockholm (SE).		(81) Designated States: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).  <b>Published</b> <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>

(54) Title: **METHOD AND APPARATUS FOR INTERFERENCE REJECTION**

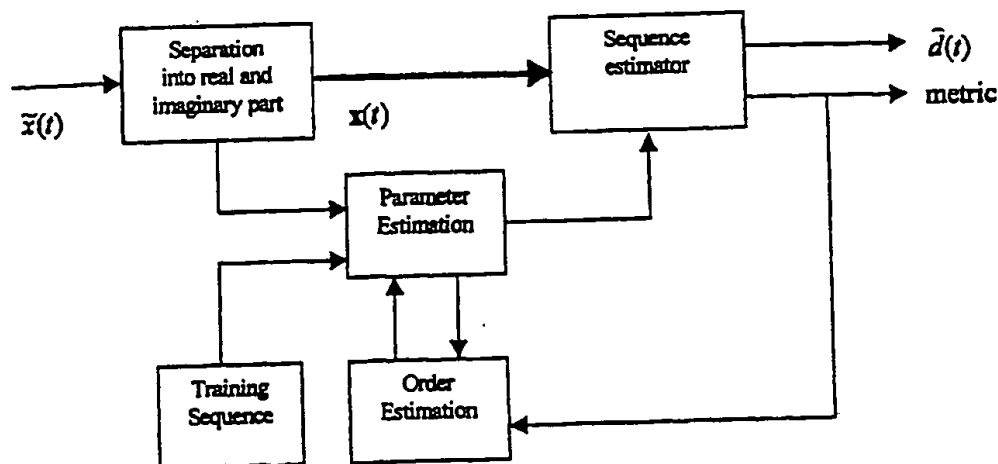

(57) Abstract

The invention relates to an apparatus, and an associated method, in a communication system that is tolerant to interference. The received signal is divided into a real and an imaginary part, and the noise and interference is modeled as a filtered process. The invention solves the interference problem by utilizing the inherent signal structure.

*FOR THE PURPOSES OF INFORMATION ONLY*

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

## METHOD AND APPARATUS FOR INTERFERENCE REJECTION

Method and apparatus for rejection of noise and interference from a received combination signal by estimation of the desired signal having in addition to noise and interference been distorted by a communication channel through which the modulated transmitted desired signal has been passed.

### DESCRIPTION OF BACKGROUND ART

In digital communication systems a transmitted signal is normally encoded, modulated and transmitted over a communication channel. The signal is sent in form of pulses that can be detected either 0 and 1 and given combinations of these "bits" form symbols with different meanings. One or more signal sequences sent in a packet data stream is called a "burst".

The information signal is sent by modulation of a carrier wave. Different modulation methods exist, of which the most usual are based on amplitude, frequency and/or phase modulation.

It is advantageous to describe different modulation forms by a complex signal representation. The complex signal represents the real physical bandpass signal in an equivalent lowpass representation. Essential features of the different modulation forms can then be represented geometrically. For example in one-dimensional modulation, the signal constellation points are located on a straight line.

Furthermore, there is a difference between linear modulation (different forms of amplitude modulation) and constant envelope modulation (angle-, phase and frequency modulation). However, almost all modulation methods used in mobile telephony can be interpreted as linear modulation with some modifications. In linear modulation, the modulator and the demodulator carry out some signal handling functions to send information by modulation of a carrier wave.

Whatever the physical medium used for transmission of the signal is, the essential feature is that the channel distorts the signal in different ways. The distorted signal is further corrupted by noise and interference. At the receiver, the signal is reconstructed and demodulated. The reconstructed signal is processed by channel and source decoders to obtain a copy of the transmitted source signal.

In a receiver with only one antenna the demodulator normally tries to combat distortion caused by the communication channel and noise but neglects the effects of interference. In order to derive efficient algorithms, the noise is normally considered to be white. If the noise is not white, a noise whitening filter can be used but this is not normally done since the color of the noise is unknown.

5

Filtering structures can be used to perform interference rejection. Adaptive or non-adaptive algorithms can be used to adjust the parameters in these filtering structures so that the desired signal can be estimated. After the filtering structures, demodulators demodulate the estimated signal of interest.

10

There are two classes of methods for choosing the parameter values. Conventional methods rely on the knowledge of training sequences embedded in the desired signals, this knowledge being used to choose an initial setting for the coefficient values, typically according to a least-squares error criterion. In an adaptation by means of a training sequence, the received data are used to find the parameters. Blind methods use one or more properties of the interference or of the desired signals instead of training sequences. Conventional methods that use a known training signal are well known to those skilled in the art of signal processing and are described in the open literature of adaptive signal processing and adaptive filtering.

15

20 The desired signal is estimated by a sequence estimator, of which there are several versions known in the art. These estimators make use of algorithms to mathematically calculate the desired signal by using filter parameters.

The most common sequence estimator used in receiver structures is the Maximum Likelihood Sequence Estimator (MLSE). The MLSE is preferably implemented with the so-called Viterbi algorithm. A version of this algorithm is the Soft Output Viterbi Algorithm (SOVA), which improves the performance of the subsequent channel decoding of the signal. The Maximum A Posteriori (MAP) algorithm gives superior performance, but is computationally more difficult. In the Decision Feedback Equalizer (DFE), already decided symbols in the process are used to decide the current symbol. A compromise between MLSE and DFE in performance is the Decision Feedback Sequence Estimator (DFSE), where it is possible to make a trade-off between computational complexity and performance. In the case with more than one antenna, some receivers can also consider the interference.

25

30

The main drawback with existing one-antenna solutions is that the algorithms consider only noise. Meanwhile, many communication systems are interference limited. The problem is that when the properties of the interference do not fit the model of the noise for which the receivers were designed, the performance of the receivers is greatly degraded.

5

The Interference Rejection Combining (IRC) receiver combines the output from antennas while trying to minimize the effect of noise and interference. There is an algorithm in the literature that considers the interference as a colored process. In deriving this algorithm, it is assumed that the noise can be described as a white sequence passed through an Auto Regressive (AR) filter.

10

The following patent documents are presented as prior art solutions in interference cancellation by means of different filter structures and for estimation of the desired signal by selection of suitable filter parameters for the filter structures.

15

In WO 98/16021 there is presented prior art solution for extracting a signal of interest from plurality of spectrally and temporally overlapping signals containing digital data. The apparatus of this solution comprises different filters producing time shifted output signals, frequency shifted output signals and linear combining means for summing said output signals and to produce an estimate of said signal of interest.

20

WO 97/11544 makes use of a noise-predictive maximum-likelihood (NPML) data detection scheme operating on signal samples received via an equalizing filter.

25

EP 0782260 A2 presents an equalizer configuration for processing real-valued and complex-valued signal samples.

30

The development of the mobile communication today is towards more and more users, which leads to increasing interference. This means that it is of great importance to find better and better methods for interference rejection and cancellation all the time and that every advantage within this area is useful.

## SUMMARY OF THE INVENTION

5 The object of the invention is a better method and apparatus of interference rejection that offers improvements in performance compared to prior art methods.

10 The methods and apparatus of the invention, which choose the values of the parameters in the filtering structures, are improved methods compared to prior art methods in that a significantly better performance is obtained. The method works with one or more antennas as well as with and without oversampling.

15 The method of the invention is mainly characterized in that the signal is received as a combination of noise, interference and the distorted desired signal through one or more antennas. The received signal is separated into a real and an imaginary part and the noise and interference component is modeled as a filtered process. By utilizing the combined structure of the signal thus obtained, an equation for the received signal is formed as a function of the desired signal distorted by the communication channel and the noise and interference component. Values for the filter parameters can then be selected in the equation, where after the desired signal can be estimated by calculation from the equation by means of the filter parameters selected.

20

The apparatus is mainly characterized by

- a) means for receiving a signal as a combination of noise, interference and the distorted desired signal through one or more antennas,
- b) means for separating the received signal into a real and an imaginary part,
- 25 c) means for modeling the noise and interference component as a filtered process,
- d) means for forming an equation for the received signal as a function of the desired signal distorted by the communication channel and the noise and interference component by utilizing the signal structure obtained in steps b) and c),
- e) means for selecting of values for the filter parameters in said equation,
- 30 f) means for estimating the desired signal by calculation from said equation by means of said filter parameters.

In the case when the symbol to be transmitted is one-dimensionally modulated in the complex plane, the present invention solves the interference problem by utilizing this inherent signal structure.

- 5 The desired signal has been one-dimensionally modulated by a sender and thereafter transmitted through a complex valued communication channel.

The received signal is known to be a combination of the transmitted desired signal and noise and interference. Thus, the distortion can be taken into consideration when estimating the desired signal.

- 10 The distortion caused by the communication channel can be modeled mathematically. This model can include the distortion of the desired signal as well as the addition of the interference and noise. Thus, the distortion is taken into consideration by modeling the channel as a linear filter in said equation so that the output of the filter is formed as a product of the filter vector and the input signal vector, like in the following equation

15 
$$\tilde{x}(t) = \tilde{\mathbf{h}} \mathbf{d}(t) + \tilde{n}(t)$$

where the diacritical marks denotes that the entity to which it is attached is complex-valued.

The received signal is separated into a real and an imaginary part, so that the received signal can be expressed as a function of the time  $t$  in the following form

20 
$$\mathbf{x}(t) = \mathbf{h} \mathbf{d}(t) + \mathbf{n}(t)$$

where the channel matrix has the following form

$$\mathbf{h} = \begin{bmatrix} h_{r0} & h_{r1} & \cdots & h_{rL} \\ h_{i0} & h_{i1} & \cdots & h_{iL} \end{bmatrix}$$

25

and

$$\mathbf{x}(t) = \begin{bmatrix} \text{Re}(\tilde{x}(t)) \\ \text{Im}(\tilde{x}(t)) \end{bmatrix}, \quad \mathbf{n}(t) = \begin{bmatrix} \text{Re}(\tilde{n}(t)) \\ \text{Im}(\tilde{n}(t)) \end{bmatrix}$$

30

and where  $\mathbf{x}(t)$  is the received signal,  $\mathbf{d}$  is the desired signal and  $\mathbf{n}$  is the combined noise and interference term and the matrix  $\mathbf{h}$  contains the channel coefficients. The channel coefficients model the distortion of the signal through the communication channel.

- 5 The noise can be modeled as a filtered process, for example as an AR-process, in which the noise is described in the following way

$$\mathbf{n}(t) = \sum_{k=1}^K \mathbf{A}_k \mathbf{n}(t-k) + \mathbf{e}(t)$$

10

where  $\mathbf{A}$  represents the filter parameters,  $K$  the number of the filter parameters,  $t$  is the time and  $\mathbf{e}$  is a white noise vector.

- Also other filter processes can be used in the invention, for example the MA-process, the  
15 mathematical equation of which is known and can be found in the open literature describing filter processes.

- The channel coefficients and the filter parameters in the modeled process for the desired signal and the noise are calculated by means of a known training sequence from the equation formed by  
20 knowledge of the data sent by the signal in the training sequence and by knowledge of the statistical properties of the noise component  $\mathbf{e}$ . There exist mathematical algorithms by which  $\mathbf{h}$  and  $\mathbf{A}$  can be calculated from the equation above when  $\mathbf{x}$  is known (being the received signal) and when the statistical properties of  $\mathbf{e}$  are known. Examples of such algorithms include least-squares and maximum likelihood methods.

25

After having selected the filter parameters and the channel coefficients, the desired signal is estimated mathematically by means of an equalization method using same type of algorithms mentioned above.

- 30 The equalization methods are carried out in a known manner for those skilled in the art and can for example be carried out by means of a sequence estimator. In mathematical terms, the desired signal can for example be estimated by maximum likelihood for the equation giving the received signal, whereby the value for the received signal giving the least error can be obtained by means of a

mathematical algorithm. When the Viterbi algorithm is used, the desired signal can be obtained without being forced to calculate the received signal for all different values of the desired signal. The idea of the mathematical approach is that the received signal is recreated by means of the channel coefficients and the selected filter parameters and different values for the desired signal, where after the recreated value of the received signal is compared with the true value for the received signal to obtain error values for the received signal. The desired signal is then estimated by selecting the sequence giving the least error for the received signal.

The method of the invention can be repeated for each received symbol sequence.

10

As was mentioned before, there are different known filter process models that can be used in the invention to model the noise signal. These processes can be selected among filter processes usually used to estimate the desired signal itself. In an MA model, the signal is a weighted sum of delayed input components, while in an AR process the signal is a weighted sum of foregoing output values.

15 The noise is preferably modeled as a white noise through an AR filter but also other filter processes can be made use of. An example of another alternative is the MA filter process.

20

The choice of the number of filter coefficients worth to be taken into consideration, i.e. the order of the AR process, can be estimated adaptively by means of known algorithms. One simple order estimation approach is to choose the largest order that gives a significant decrease in the prediction error. Another way to choose the proper model order is to use each estimated model to estimate a number of transmitted symbols and the corresponding error. The error for different model orders can be calculated recursively, i.e. the parameters calculated in the current step can utilize the parameters calculated in the previous step in order to simplify the computational complexity.

25

The method of the invention can be made computationally less complex by prefiltering. The basic idea with prefiltering is to decrease the time spread of the channel, thus reducing the complexity of the sequence estimator. The prefiltering can be made by known methods.

30 It is possible to gain some additional performance if oversampling is used. Oversampling means that the sampling is faster than the bit rate or the symbol rate. By introducing oversampling, more channels are obtained as we get more samples and mathematically this fact can be put in the equation in the term describing the length of the channel and the amount of samples.

Prior knowledge of the filter structures can also be used to reduce the amount of parameters. It is then primarily a question about the physical properties of the channel which are utilized in the equation.

- 5 Decision direction is also a well known method of improving the performance of the system. The concept is based on the idea that once all or some of the transmitted symbols are estimated, the values are used in a renewed estimation of the channel and filter parameters. These estimates are then used for renewed estimation of the transmitted symbols.
- 10 The received signal is preferably linearly modulated with a one-dimensional constellation in the method of the invention, but if the received signal has been non-linearly modulated, the signal can in some cases be de-rotated to obtain a linear modulation.. One example of a modulation method that can be de-rotated is MSK (Minimum Shift Keying). Another example is GMSK (Gaussian MSK), which is the modulation scheme in GSM. Although GMSK is a non-linear modulation
- 15 scheme and cannot be transformed into a linear one, it has been shown that it can be approximated to a linear one with good accuracy.

It has been observed through extensive simulations that in interference environments, the receiver described in the present invention offers substantial improvements in performance, primarily in the

20 form of lower Bit Error Rates (BER), which in turn allows operation with much lower Carrier to Interference Ratios (CIR).

## SIMULATION RESULTS

- 25 The method of the invention is simulated for different values of the order of the AR process, namely  $K=1$  and  $K=2$ . The invention is also simulated for an embodiment of the invention, wherein the order is chosen adaptively. The channel is a typical urban channel described in the GSM specification, and it is also the GSM system that is used for communication. White Gaussian noise is also added with a  $E_b/N_0$  value of 25 dB, where  $E_b$  is the energy per bit and  $N_0$  is the noise
- 30 spectral power.

The results of the simulations are shown in Figure 1, wherein the performance of the invention is compared to a conventional receiver. The result is shown as the BER as a function of the carrier to interference ratio (CIR). The conventional receiver used is a Viterbi algorithm with five taps. This

conventional receiver is very similar to what is used in most state of the art solutions. It fulfills the demands in the GSM specification with a 2 dB margin. At a BER level of 3% the improvement with the method of invention is about 7 dB. It should be noted that this is an extremely large improvement. Normally an improvement of a fraction of a dB is considered worthwhile. The computational complexity when  $K=2$  is about four times the conventional receiver. For the case  $K=1$  the improvement is less than 2 dB. The adaptive method that automatically chooses the order of  $K$  performs very well also.

In the following, some preferred embodiments of the invention will be described by means of figures and particular mathematical calculation algorithms. One skilled in the art understands that the invention can also be performed with other equalization methods and filter processes than those presented in the figures and that the maximum likelihood criteria equations can vary. In other words, the details of the invention can vary within the scope of the claims.

15

## BRIEF DESCRIPTION OF THE FIGURES AND PREFERRED EMBODIMENTS

FORMULAS 1 – 23 describe an estimation of the desired signal for the preferred embodiment of the invention

The performance of the invention compared to a conventional receiver is displayed in Figure 1. The main characteristics of the present invention are schematically described in Figure 2.

25

## DETAILED DESCRIPTION OF THE FIGURES AND PREFERRED EMBODIMENTS

An example of a detailed mathematical model for the estimation of the desired signal will now be presented by means of formulas 1 -23. The mathematical calculations themselves are known by one skilled in the art and are used in the invention in which the desired signal is estimated by dividing the signal in a real and an imaginary part and by modeling the noise as a filtered process.

30

A transmitted signal  $d(t)$  signal, which is received in the method of the invention has been linearly modulated and passed through a complex communication channel  $h$ . The communication channel cause a distortion on the desired signal and as the received signal is a combination of the distorted

desired signal, and the noise and interference component, the complex-valued signal  $x(t)$  can be formed as in equation 1.

The diacritical mark denotes that the corresponding entity is complex-valued and  $n(t)$  denotes the additive noise and interference. In equation 1,  $\mathbf{h}$  is a vector of the form according to equation 2, where the subscript  $r$  and  $i$  denotes the real and imaginary part of the coefficients, respectively, and  $L$  is the length of the communication channel in bit periods.

The vector  $\mathbf{d}(t)$  in equation 1 contains the delayed samples of the transmission symbols and can be expressed as in equation 3 where  $T$  denotes the transpose operator.

By separating equation 1 into its real and imaginary counterparts we get equation 4, where  $\mathbf{h}$  can be expressed as a matrix according to equation 5, and  $x(t)$  and  $n(t)$  as in equations 6a and 6b, respectively.

It has to be noted that in equation 4, all entities are real-valued. The model in equation 4 has one input and two outputs. If  $\mathbf{h}$  is not degenerate e.g. is identically equal to zero,  $d(t)$  can be estimated from both the real and imaginary part of the received signal (the first and the second row of equation 4). Hence it is clear that if  $d(t)$  is real-valued there is an inherent redundancy in the received signal. This is the redundancy that will be used to design an interference rejecting receiver

In this embodiment of the invention, we choose to model the noise and interference as an AR process according to equation 7, where  $e(t)$  is a white noise with covariance matrix expressed as in equation 8.

Equation 7 can be rewritten as equation 9, where  $\mathbf{N}(t)$  can be expressed as in equation 10 and  $\mathbf{M}_A$  as in equation 11.

An equation for the received signal will now be formed. Equation 4 can be written in an augmented form according to equation 12, where  $\mathbf{X}(t)$  is defined similarly to equation 10 so that  $\mathbf{D}(t)$  is written as in equation 13 and  $\mathbf{H}$  as in equation 14.

By multiplying equation 12 with  $\mathbf{M}_A$  equation 15 is obtained.

If  $M_A$  and  $H$  would be known, the source signal could be estimated by minimizing the maximum likelihood criteria according to equation 16. Different equalization methods exist for this estimation and usually this is done by means of a so called sequence estimator, known in the art. The MLSE (Maximum Likelihood Sequence Estimator) mentioned is implemented by a  
5 mathematical algorithm, preferably the Viterbi (or SOVA) algorithm.

In practice  $M_A$  and  $H$  are not known and hence they must be estimated. If we have a training sequence, sent in connection with the desired signal and known by the receiver, i.e.  $d(t)$  is known for certain time-indices, the criterion in equation 17 can be used to find the parameters in  $M_A$  and  $H$   
10 as well as in  $Q$ . In general this is a nonlinear minimization which can be numerically cumbersome.

Embodiments of the invention with other filter structures and other orders of the process will now be described. Above the noise and interference has been described as an AR process. If a definition according to equation 18 is made by not considering the structure of  $B$ , the parameters can instead  
15 be estimated as in equation 19. These estimates and equation 20 can then be used in the estimation of the unknown transmitted symbols. The minimization problem in equation 19 is a simple linear least square problem, which is well described in the literature. When the simplification in equation 18 is introduced, we get a so called ARX model for the received signal. By the definition in equation 18, we have fixed the order of  $B$  to  $L+K$ . In one embodiment of the invention  $B$  is set to  
20 the order, which is not necessarily fixed to  $L+K$ . Normally, we would have  $M > \text{or} = L$ , but the invention is not limited to this case.

There will now be described an embodiment of the invention wherein an adaptive method is used to choose the order of the filter process. Assume for instance that the receiver operates in a pure noise  
25 environment, so that  $A_1=A_2=0$ , or equivalently  $n(t) = e(t)$ . Then it is desirable to set the order of the AR model to  $K=0$  in order not to describe the process with too many parameters. In other words, we want to avoid an over-parameterization of the problem, which might lead to a worse situation than the correct model. A version of the invention in which the model order is adaptive. There are many methods used to determine the model order available in the literature. Most of them  
30 rely on some criterion that is based on the magnitude of the estimation errors. These residuals reflect how well the model order fits the data used in the estimation. If we increase the model order, the magnitude of the residuals will always decrease. There is needed a test telling if this decrease is significant or not. In this embodiment of the invention, the magnitude of the residuals is given by the norm of the estimated of the noise covariance matrix  $Q$ . Many order estimation procedures have

been described in the literature that apply to the present invention. Maximum likelihood methods, like the Final Prediction Error (FPE), Akaike's Information criterion (AIC) and its variants (such as the so called BIC and CIC) and Minimum Description length (MDL) are all applicable to the problem treated in the invention. Also sub optimal methods exist. These methods rely on the fact  
 5 that the covariance matrix of the received signal has a certain rank structure that can be used to infer the order of the system to be identified. A major drawback with the order estimation methods is their computational complexity, why more practical methods are implemented. One simple algorithm that estimates the order of the model is outlined in the following. The algorithm is given for the case  $M=K+L$ , but can be generalized to general ARX models.

- 10 1) set  $K=0$ ,  $r_{-1} = \text{infinity}$
- 2) estimate the parameters of the systems with the current model order
- 3) evaluate  $r_K = \|Q\|$
- 4) If  $r_K/r_{K-1}$  is significantly smaller than 1 and  $K < K_{\max}$ , increase  $K$  with one and go to step 2
- 5) Choose the  $K$  that gave the latest significant reduction of  $r_K$

15

The term "significantly" in the algorithm above is defined by a certain threshold. This threshold is a trade-off between the performance in noise and interference environments. The smaller the threshold, the better the performance in noise.

- 20 A conceptually different method to choose the proper model order is to use each estimated model to determine a number of transmitted symbols. The resulting metric describing the estimation error from the Viterbi algorithm can then be used instead of the residual. The advantage of this method is that it provides a model order validation, which is independent of the data used in calculating the model.

25

Another way of having adaptive order selection is to implement the identification algorithm recursively in the order. For scalar systems this method is often referred to as the Levinson-Durbin algorithm (LDA). By extending the conventional LDA to multidimensional systems, it can be used in the present invention resulting in a significant saving in computations compared to standard  
 30 techniques. The recursion is stopped when the residuals are small enough, thus minimizing the number of necessary operations.

The present invention is computationally more complex than a conventional MLSE receiver, i.e. a receiver wherein an equalization method is used. If it is necessary to reduce the computational complexity, pre-filtering is used. For illustration,  $M=K+L$  is considered and a general ARX model is used. The idea is to concentrate the main energy in  $B$  into fewer taps i.e. reduce the time dispersion of the filter and then to use the model in the equalizer. The first row of equation 15 is then expressed as equation 21, where the introduced notation has obvious definitions and  $q^{-1}$  is the unit delay operator. A pre filter  $F(q^{-1})$  is introduced and the filter of equation 21 and equation 22 is obtained. The remaining rows of eq 15 are similarly transformed. The choice of the number of remaining significant taps depends on a trade-off between how much we need to reduce the computational complexity and noise amplification. The determination methods are readily available in the signal processing literature.

An embodiment of the invention is to combine the model of equation 15 with other receiver structures to reduce the computational complexity, while keeping the loss in performance at a modest level. An example is the DFSE algorithm earlier mentioned. The DFSE is well described in the literature. And is directly applicable to equation 15 by one skilled in the art.

The invention can be used with one or more antennas. In equation 1  $\tilde{h}$  would then be an  $m \times L+1$  matrix where  $m$  is the number of antennas. Correspondingly, in equation 4,  $h$  would be an  $2m \times L+1$  matrix and  $x(t)$  would have  $2m$  elements.

It is possible to get some additional performance if oversampling is introduced. Oversampling in this case refers to sampling faster than the bit rate. Typically the oversampling factor, denoted by  $P$ , would be equal to 2 or 4, but other values are of course possible. The extension to handle the case with oversampling is very similar to the extension to multiple antennas described above. When oversampling with a factor  $P$ ,  $\tilde{h}$  in equation 1 would be a  $P \times L+1$  matrix. Row  $k$  of equation 1 would correspond to samples  $k, k+P, k+2P, \dots$ . Correspondingly, in equation 4,  $h$  would be a  $2P \times L+1$  matrix and the vector  $x(t)$  would have  $2P$  elements. By introducing oversampling we get more channels than with symbol rate sampling, which gives larger potential for the interference rejection. On the other hand, the higher the oversampling factor, the higher the correlation between adjacent channels (in  $h$ ). Therefore there is a limit to what performance gain can be achieved with oversampling.

In one embodiment of the invention prior knowledge of the receiver/transmitter and pulse shaping filter is taken into consideration. In general, when the modulation is linear, the channel is the convolution between the physical channel and a combination of the receiver, transmitter and pulse shaping filters. This latter combined filters is known to the receiver and it is possible to use this information in the demodulation process. It has been shown that the composite channel vector can be written as in equation 23, where  $G$  is a matrix formed from the known filters and  $c$  is a vector with the parameters of the physical channel. This formulation is particularly useful when we use the oversampling described above. The reason is that the different channels all consist of the same physical channels, but differ only in the matrix  $G$  which can be computed in advance. Hence we have greatly reduced the number of parameters in the problem. Receivers using multiple antennas can also benefit from this kind of modeling. In this case the large dimensionality of the problem makes it important to keep the number of parameters to a minimum.

Decision direction is a well-known method to improve the performance of a receiver in a communication system. The concept is based on the idea that once we have estimated all (or a certain number) of the transmitted symbols, we make a hard decision about these symbols and use the decisions to re-estimate the model parameters with increased accuracy. This methodology, which can be repeated a desired number of times, is well documented in the literature. In combination with the method of the invention, decision direction is particularly useful. The reason is that in most practical communication systems, the number of training symbols is small in order not to waste information bandwidth. In the present invention, there are more parameters to estimate than in a conventional receiver, hence the quality of the parameter estimates can be significantly increased if decision direction is used.

The preferred embodiment of the invention is described in Figure 2. The possibly over-sampled complex-valued signal, received with one or more antennas, is split into its real and imaginary part to obtain the vector in Equation 4. This vector is fed to the sequence estimator which determines the transmitted symbols using estimates of the parameters in the filters and of the model in Equations 15-18. These estimates are obtained using an available training sequence, and the number of parameters in the filters are obtained as an output of the order estimation algorithm. The model order can be obtained in several ways. One method described in the present invention relies on a test (described in 1-5 above) on the residuals from the parameter estimation, another method is decision direction from the metric obtained as an output of the sequence estimator; the model order giving the smallest metric when applied to the training sequence is used to estimate the data.

$$\tilde{\mathbf{x}}(t) = \tilde{\mathbf{h}} \mathbf{d}(t) + \tilde{\mathbf{n}}(t)$$

$$\tilde{\mathbf{h}} = [h_{r0} + ih_{i0} \quad h_{r1} + ih_{i1} \quad \dots \quad h_{rL} + ih_{iL}]$$

$$\mathbf{d}(t) = [d(t) \quad d(t-1) \quad \dots \quad d(t-L)]^T$$

$$\mathbf{x}(t) = \mathbf{h} \mathbf{d}(t) + \mathbf{n}(t)$$

$$\mathbf{h} = \begin{bmatrix} h_{r0} & h_{r1} & \dots & h_{rL} \\ h_{i0} & h_{i1} & \dots & h_{iL} \end{bmatrix}$$

10

$$\mathbf{x}(t) = \begin{bmatrix} \text{Re}(\tilde{\mathbf{x}}(t)) \\ \text{Im}(\tilde{\mathbf{x}}(t)) \end{bmatrix}, \quad \mathbf{n}(t) = \begin{bmatrix} \text{Re}(\tilde{\mathbf{n}}(t)) \\ \text{Im}(\tilde{\mathbf{n}}(t)) \end{bmatrix}$$

$$\mathbf{n}(t) = \sum_{k=1}^K \mathbf{A}_k \mathbf{n}(t-k) + \mathbf{e}(t)$$

$$E\{\mathbf{e}(t)\mathbf{e}^T(t)\} = \mathbf{Q}$$

$$\mathbf{M}_A \mathbf{N}(t) = \mathbf{e}(t)$$

20 10

$$\mathbf{N}(t) = \begin{bmatrix} \mathbf{n}(t) \\ \vdots \\ \mathbf{n}(t-K) \end{bmatrix}$$

$$\mathbf{M}_A = [\mathbf{I} - \mathbf{A}_1 \dots - \mathbf{A}_K]$$

$$\mathbf{X}(t) = \mathbf{H} \mathbf{D}(t) + \mathbf{N}(t)$$

25

$$\mathbf{D}(t) = [d(t) \quad d(t-1) \quad \dots \quad d(t-L-K)]^T$$

14

$$\mathbf{H} = \begin{bmatrix} h_{r0} & h_{r1} & \dots & h_{rL} & 0 & \dots & 0 \\ h_{i0} & h_{i1} & \dots & h_{iL} & 0 & \dots & 0 \\ 0 & h_{r0} & h_{r1} & \dots & h_{rL} & \dots & 0 \\ 0 & h_{i0} & h_{i1} & \dots & h_{iL} & \dots & 0 \\ \vdots & \vdots & \vdots & \vdots & \vdots & \vdots & \vdots \\ \vdots & \vdots & \vdots & \vdots & \vdots & \vdots & \vdots \\ 0 & \dots & 0 & h_{r0} & h_{r1} & \dots & h_{rL} \\ 0 & \dots & 0 & h_{i0} & h_{i1} & \dots & h_{iL} \end{bmatrix}$$

$$\mathbf{M}_A \mathbf{X}(t) = \mathbf{M}_A \mathbf{H} \mathbf{D}(t) + \mathbf{e}(t)$$

$$\{\mathbf{d}(t)\} = \arg \min \|\mathbf{M}_A \mathbf{X}(t) - \mathbf{M}_A \mathbf{H} \mathbf{D}(t)\|^2 \mathbf{Q}^{-1}$$

$$\{\mathbf{M}_A, \mathbf{H}, \mathbf{Q}\} = \arg \min \|\mathbf{M}_A \mathbf{X}(t) - \mathbf{M}_A \mathbf{H} \mathbf{D}(t)\|^2 \mathbf{Q}^{-1}$$

$$\mathbf{B} = \mathbf{M}_A \mathbf{H}$$

$$\{\mathbf{M}_A, \mathbf{B}, \mathbf{Q}\} = \arg \min \|\mathbf{M}_A \mathbf{X}(t) - \mathbf{B} \mathbf{D}(t)\|^2 \mathbf{Q}^{-1}$$

$$\{\mathbf{d}(t)\} = \arg \min \|\mathbf{M}_A \mathbf{X}(t) - \mathbf{B} \mathbf{D}(t)\|^2 \mathbf{Q}^{-1}$$

$$\mathbf{y}(t) = \mathbf{B}_1(q^{-1}) \mathbf{d}(t) + \mathbf{e}_1(t)$$

$$\mathbf{F}(q^{-1}) \mathbf{y}(t) = \mathbf{F}(q^{-1}) \mathbf{B}_1(q^{-1}) \mathbf{d}(t) + \mathbf{F}(q^{-1}) \mathbf{e}_1(t)$$

$$\mathbf{Gc}$$

## CLAIMS

1. Method of rejection of noise and interference from a received combination signal by estimation of the desired signal having in addition to noise and interference been distorted by a communication channel through which the modulated transmitted desired signal has been passed, characterized by the following steps
  - a) receiving a signal as a combination of noise, interference and the distorted desired signal through one or more antennas,
  - b) separating the received signal into a real and an imaginary part,
  - c) modeling the noise and interference component as a filtered process,
  - d) forming an equation for the received signal as a function of the desired signal distorted by the communication channel and the noise and interference component by utilizing the signal structure obtained in steps b) and c),
  - e) selecting of values for the filter parameters in said equation,
  - f) estimating the desired signal by calculation from said equation by means of said filter parameters selected in the foregoing step.
2. Method of claim 1, characterized in that in step d), said distortion caused by the communication channel is taken into consideration by modeling the channel as a linear filter coefficient in said equation.
3. Method of claim 2, characterized in that said filter parameters and channel coefficient are calculated by means of a known training sequence from the equation formed in step d) by knowledge of the data sent by the signal in said training sequence and by knowledge of the statistical properties of the noise component, whereafter the desired signal is estimated mathematically by means of an equalization method.
4. Method of claim 3, characterized in that the equalization method is carried out by means of a sequence estimator using a mathematical algorithm for the estimation.
5. Method of claim 3, characterized in that in the filter parameters and the channel coefficient mathematical algorithm, the number of the parameters is selected by an order estimation procedure.

6. Method of any of claims 3 - 5, characterized in that in the mathematical algorithm, the desired signal is estimated mathematically by using the maximum likelihood method for the equation giving the received signal, whereby the value for the received signal giving the least error can be obtained without being forced to calculate the received signal for different values of the desired signal.
7. Method of any of claims 3 - 5, characterized in that the received signal is recreated by means of the channel estimate and the filter parameters and different values for the desired signal, the recreated value of the received signal is compared with the true value for the received signal to obtain error values for the received signal, estimating the desired signal by selecting the one giving the least error for the received signal.
8. Method of any of claims 1 - 7, characterized in that the method is repeated for each received symbol sequence.
9. Method of any of claims 1 - 8, characterized in that in step c), the noise and interference is modeled as an AR filter process.
10. Method of any of claims 1-8, characterized, in that in step c) and d) the noise and interference and channel is modelled so that the received channel is described by an ARX model.
11. Method of claim 9, characterized in that the number of filter parameters worth to be taken into consideration in the AR process are estimated adaptively by means of known algorithms.
12. Method of any of claims 1 - 11, characterized in that the received signal has been linearly modulated.
13. Method of any of claims 1 - 11, characterized in that the received signal has been non-linearly modulated, whereby after step a), the signal is de-rotated.

14. Method of any of claims 1 - 11, characterized in that the received signal has been non-linearly, whereby after step a), the signal is approximated with a linearly modulated signal. by means of de-rotation.
- 5 15. Method of any of claims 5 - 14, characterized in that an adaptive order selection method of the process is used.
16. Method of any of claims 5 - 14, characterized in that a suboptimal method for estimation of the desired signal is used.
- 10 17. Method of any of claim 15, characterized in that in said adaptive order selection method the adaptive order is estimated by using a threshold test on the residuals.
18. Method of claim 15, characterized in that each estimated model of different orders is used to equalize a number of symbols and determine the corresponding metric and using said metric to select said model order.
- 15 19. Method of any of claims 17 - 18, characterized in that the adaptive order selection method used is a recursive implementation of the identification algorithm.
- 20 20. Method of any of claims 1 - 19, characterized in that prefiltering is used before the filter process, which is implemented in the equalization method.
21. Method of any of claims 1 - 20, characterized in that oversampling is used to obtain more channels thereby giving larger potential for the system.
- 25 22. Method of any of claims 1 - 21, characterized in that in linearly modulated systems, the information of the filter is taken into consideration in the demodulation process.
- 30 23. Method of any of claims 1 - 22, characterized in that the performance of the receiver is improved by decision direction, whereby the decisions of the received symbols is used in a re-estimating of the same.

24. Apparatus for rejection of noise and interference from a received combination signal having functions for estimation of the desired signal which in addition to noise and interference has been distorted by a communication channel through which the modulated transmitted desired signal has been passed, c h a r a c t e r i z e d by

a) means for receiving a signal as a combination of noise, interference and the distorted desired signal through one or more antennas,

b) means for separating the received signal into a real and an imaginary part,

c) means for modeling the noise and interference component as a filtered process,

d) means for forming an equation for the received signal as a function of the desired signal distorted by the communication channel and the noise and interference component by utilizing the signal structure obtained in steps b) and c),

e) means for selecting of values for the filter parameters in said equation,

f) means for estimating the desired signal by calculation from said equation by means of said filter parameters.

25. Apparatus of claim 24, c h a r a c t e r i z e d in that said distortion caused by the communication channel is taken into consideration in said equation by the means for forming the equation by modeling the channel as a linear filter coefficient.

26. Apparatus of claim 25, c h a r a c t e r i z e d in that said means for selecting of values for the filter parameters in said equation include means for calculating the filter parameters and channel coefficient by means of a known training sequence from the equation by knowledge of the data sent by the signal in said training sequence and by knowledge of the statistical properties of the noise component,

the means for estimating the desired signal from said equation by means of said filter parameters calculating the desired signal by means of a sequence estimator.

27. Apparatus of claim 26, c h a r a c t e r i z e d in that the sequence estimator uses a mathematical algorithm for the estimation.

28. Apparatus of any of claims 24- 27, c h a r a c t e r i z e d in that the means for modeling the noise and interference uses an AR filter process.

29. Apparatus of claim 28, characterized in that the means for modeling the noise and interference using an AR filter process comprises means for estimating the number of filter parameters worth to be taken into consideration using known adaptive algorithms.

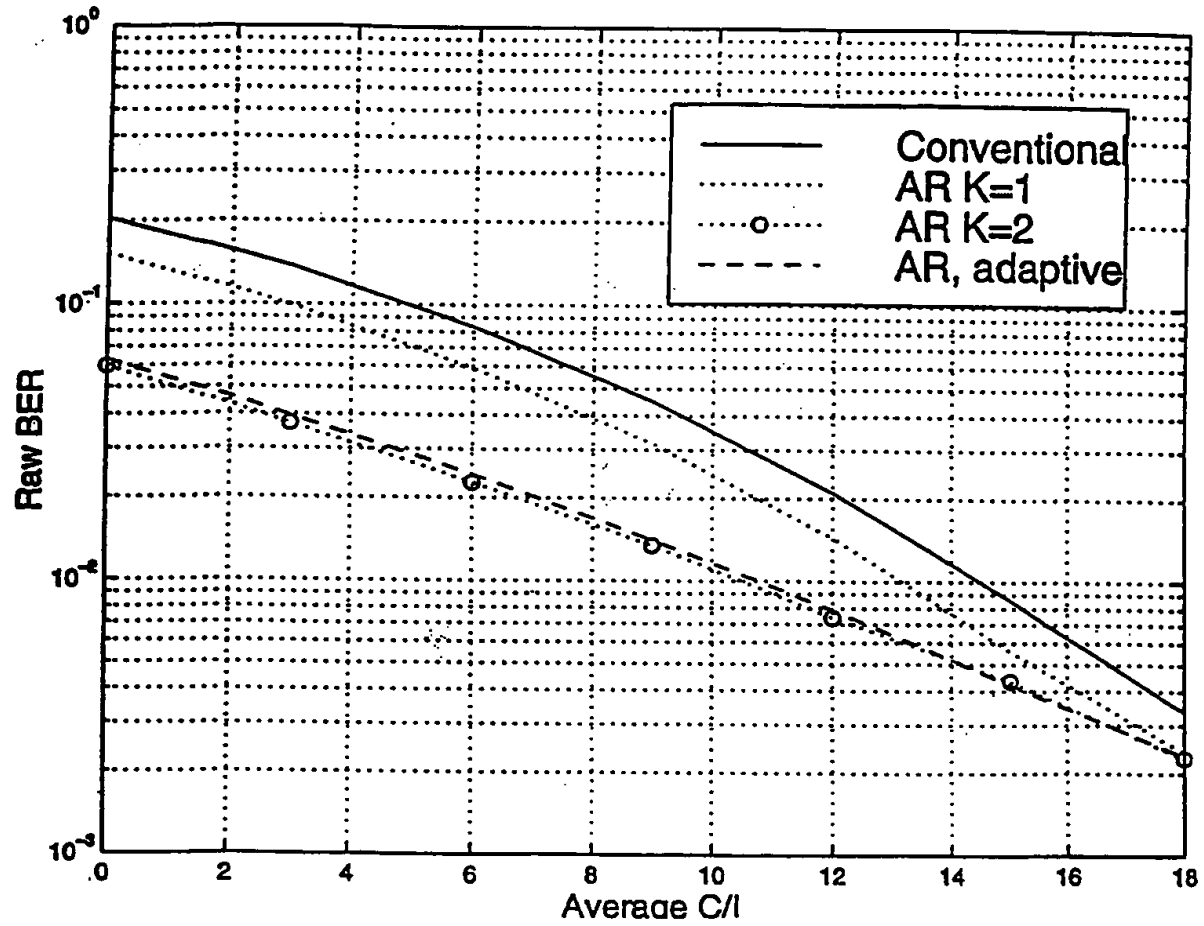


Fig. 1

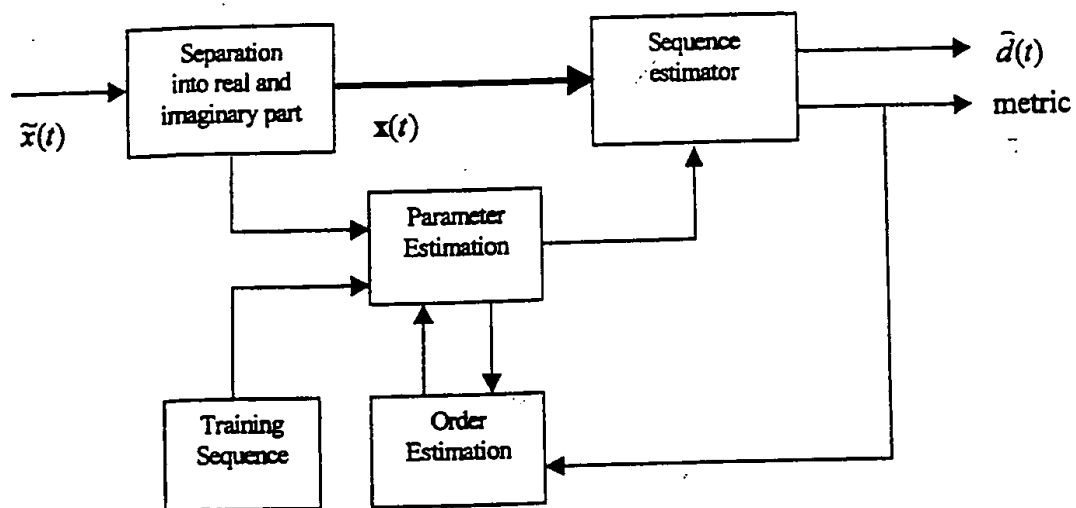


Fig. 2

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 00/00668

## A. CLASSIFICATION OF SUBJECT MATTER

IPC7: H04B 1/10

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: H04B, H04L, H03H

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
D,A	WO 9816021 A1 (STATISTICAL SIGNAL PROCESSING, INC.), 16 April 1998 (16.04.98), page 5, line 28 - page 10, line 1	1-29
	--	
A	International Conference on Communications, 1992. ICC'92, Conference SUPERCOMM/ICC'92, Discovering a New World of Communication, pages 942-947 vol. 2, 14-18 June 1992, Chevillat P.R. et al: "Noise-predictive partial-response equalizers and applications", see abstract, section I, II	1-29
	--	
A	US 5703903 A (S.D. BLANCHARD ET AL.), 30 December 1997 (30.12.97), abstract, claims	1-29
	--	

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

## \* Special categories of cited documents

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

11 Sept 2000

Date of mailing of the international search report

18 -09- 2000

Name and mailing address of the ISA /  
 Swedish Patent Office  
 Box 5055, S-102 42 STOCKHOLM  
 Facsimile No. +46 8 666 02 86

Authorized officer

Fredrik Blomqvist/AE  
 Telephone No. +46 8 782 25 00

## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/SE 00/00668

## C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>IEEE International Conference on Communications, 1990. ICC'90, Including Supercomm Technical Sessions. SUPERCOMM/ICC'90., pages 1742-1746, vol. 4, 16-19 April 1990, D.W. Lin et al: "Receiver optimization for dispersive channels employing coded modulation, with application in high rate digital subscriber line transmission", see section II, III, figure 4</p> <p style="text-align: center;">-- -----</p>	1-29

**INTERNATIONAL SEARCH REPORT**  
Information on patent family members

08/05/00

International application No.  
PCT/SE 00/00668

Patent document cited in search report			Publication date		Patent family member(s)		Publication date	
WO	9816021	A1	16/04/98	AU	2312599 A	26/07/99		
				AU	7439596 A	05/05/98		
				EP	0956650 A	17/11/99		
				WO	9935491 A	15/07/99		
-----								
US	5703903	A	30/12/97	NONE				
-----								